


ALISPY



The Alisply system is a high-strength concrete forming system designed for fast-paced gangform operations.

Benefits:

- Clamp-style connections make setting up gangs fast!
- Unique hardware and accessories are simple to use.
- Long service life reduces total applied forming costs.
- Compatible with other Symons forming systems.

ALISPY SYSTEM DESIGN

Panels and fillers



This metric, modular system consists of a galvanized steel frame and a phenolic resin-coated 15 mm (5/8") plywood face. It provides the strength, durability and finish needed for most gangforming applications.

Alisply has the strength required for the large contact areas and fast pour rates common in large gangform applications. With a design pressure of 6000 kg/m² (1228.8 psf), only two ties are needed for 3 meter panel heights.

Alisply forms can be used horizontally or vertically, even within the same gang. Available in various widths from 25 to 200 cm, and heights of 1 or 3 meters, this wide range of panel and filler sizes means that you'll be able to form almost any wall dimension. When combined with inside and outside corners and accessories, pilasters, bulkheads and columns can be formed with standard equipment, minimizing costly job-built forming operations.

Corners


Inside and outside corners are available in 1 and 3 meter heights. The inside corners come in three widths: 25 cm x 25 cm, 30 cm x 30 cm and 35 cm x 35 cm (approximately 10" x 10", 12" x 12" and 14" x 14"). They feature the same resin-coated plywood face as the panels and fillers. Outside corners are constructed of galvanized steel.

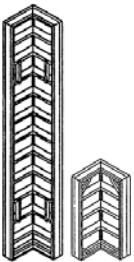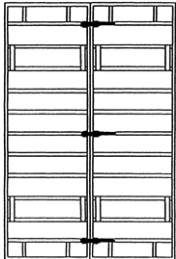

ALISPY SYSTEM COMPONENTS


The Alisply system features clamp connections that eliminate the need for tools and aligning bars. Setting up or changing the configuration of gangs is quick and simple with these innovative attachment clamps.

Other clamp-style forming systems may require several types of specialized clamps even for relatively common applications. Alisply has just two clamps that are used for any forming configuration. This reduces confusion, boosts productivity and simplifies operations.

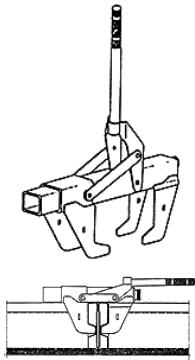

Connecting Clamp

Attaching and removing the Connecting Clamp requires no tools. A simple lever action opens and closes the “jaws”, and a large tension screw is easily adjusted by hand. This clamp is used vertically or horizontally on panels, fillers and corners. Whether side-by-side or stacked, Alisply forms are easy to connect.



Adjustable Clamp

The Adjustable Clamp also requires no tools to install. The large wing nut on the handle adjusts the clamping “jaws” to accommodate lumber fillers up to 25 cm (10”) wide. Like the Connecting Clamp, the Adjustable Clamp can be used vertically or horizontally to create the exact dimension required.

ALISPY TIES AND HARDWARE

Heavy Duty Ties

Symons offers various heavy duty tie and hardware options to complement the AlisplyT forming system.

She-Bolts

With the use of a She-Bolt Cone, the same 15 mm diameter rod is used for both the inner and the outer attachment rod. The inner tie is always 4 inches shorter than the wall thickness to work in combination with the length of the She-Bolt Cone.

Adjustable Top Tie

The Adjustable Top Tie Bracket, a real time and cost saver, connects opposing panels and simultaneously functions as a spreader. All components are above the form and concrete placement, making the entire assembly reusable.




Taper Ties

The reusable Taper Tie is tapered from 5/8" diameter to 3/4" diameter with an ultimate capacity of 36,800 lbs. Standard Taper Ties are available in a variety of lengths to permit wall thicknesses from 8" to 30".

Taper Ties offer the advantage of using the same diameter nut on both ends, making setting simpler and faster.

Symons AlispalyT forms and reusable ties combine to create a remarkably strong concrete forming system. The tying system consists of the Thread Bar, a PVC tube with Cone Caps, plate washers and wing nuts.



Thread Bar

The high strength, weldable and bendable 15mm (5/8") ductile steel bar has a full-length, cold-rolled contour thread. The 2 1/2" threads per inch offers fast installation and stripping. The Thread Bar is available in 20'-0" standard lengths and can be cut to specific project requirements. Field cutting, with Carborundum blades, is easily accomplished without thread damage.

PVC tube and Cone Caps

PVC tubes and reusable Cone Caps ensure accurate form spacing and protect the Thread Bar to allow them to be used repeatedly.

Plate washer and wing nut

No walers are needed at tie locations. Plate Washers rest directly on form crossbars, reducing equipment needs and simplifying set-up operations.

The durable, course thread pitch of the tie system makes tie installation and stripping faster because workers need just a few spins of the wing nut to place the tie.


ALISPY ACCESSORIES



Transition Filler

Symons manufactures a Transition Filler that allows contractors to combine the speed of the clamped systems for large, straight sections with the versatility of Steel-Ply®. Details and cut-up areas can be easily formed without wasting time constructing job-built fillers.

The Transition Filler can also be used to connect Alisply to Versiform®, Max-A-Form® or Flex-Form® components. This versatility allows contractors to combine several systems in their inventory, or rent forms from a different system as needed.

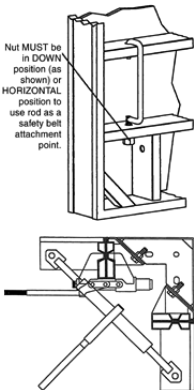

Tie-Off Rod

The Symons Alisply Tie-Off Rod allows easy attachment of personal safety equipment. This exclusive design meets the U.S. Occupational Safety and Health Administration (OSHA) 5000 lb. capacity requirement for personal fall protection. The design improves worker safety without reducing productivity.

Three-Piece Stripping Corner


The inside stripping corner allows core walls to be set and stripped without disassembling the gangs. The corner consists of three pieces which partially disconnect and slide inward with ratchet turnbuckles at the top and bottom of each gang.

Aligner Connector

The Aligner Connector is used to connect the Pipe Form Aligner when Alisply crossmembers are in a horizontal position. A 5/8" x 5" bolt with two 5/8" diameter nuts are required to connect the Aligner Connector.

AlisplyT Waler Connectors

Symons Alisply Waler Connectors quickly attach Versiform® walers to Alisply to provide vertical alignment. A minimum of two Waler Connectors are required per panel. To prevent waler slippage, a Waler Connector Channel should be used at one of the Alisply Waler Connectors on each vertical waler.




Lap Plate

The Lap Plate is available in 1 and 3 meter lengths. The Lap Plate is adjustable to any width from 6 cm (2-1/2") to 25 cm (9-1/2") which reduces time-consuming job-building operations for small spans.

Walkway Bracket

The all-steel one-piece Walkway Bracket assembly allows safe worker access. The bracket pins onto AlisplyT forms with attached hardware. Built-in clips provide lumber insertion points for fast, simple walkway assembly.

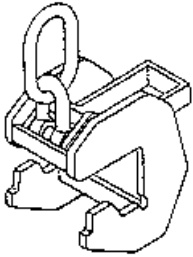

Lifting Bracket

The AlisplyT Lifting Bracket has a load rating of 1000 kg (2200 lbs.). Two clamps are used to lift a typical 31.4 m² (3838 ft²) gang.

Easily clipped onto and removed from the top rail of a gang, Lifting Brackets are only attached to the gangs during transport. With a quick flip of the lever, they can quickly be moved from gang to gang, reducing the amount of equipment needed on the site.

Bulkhead Bar

You don't need extra outside corners and narrow panels on hand to form bulkheads. The Bulkhead Bar provides a simple way to produce these details with lumber. Bulkhead forms and the supporting lumber are held in place by placing one end of the Rod inside the panel rail, and attaching the washer and nut, provided.